

TABLE OF CONTENTS

SECTION 5

PERFORMANCE

Paragraph No.		Page No.
5.1	General	5-1
5.3	Introduction - Performance and Flight Planning	5-1
5.5	Flight Planning Example	5-3
5.7	Performance Graphs	5-9
	List of Figures	5-9

**SECTION 5
PERFORMANCE**

5.1 GENERAL

All FAA required, as well as complementary performance information applicable to the Cadet, is provided by this section.

Performance information associated with optional systems and equipment that require handbook supplements is provided in Section 9, Supplements.

5.3 INTRODUCTION - PERFORMANCE AND FLIGHT PLANNING

The performance information presented in this section is based on measured Flight Test Data corrected to I.C.A.O. standard day conditions and analytically expanded for the various parameters of weight, altitude, temperature, etc.

The performance charts are unfactored and do not make any allowance for varying degrees of pilot proficiency or mechanical deterioration of the aircraft. This performance, however, can be duplicated by following the stated procedures in a properly maintained airplane.

Effects of conditions not considered on the charts must be evaluated by the pilot, such as a soft or grass runway surface on takeoff and landing performance, or winds aloft on cruise and range performance. Endurance can be grossly affected by improper leaning procedures, and inflight fuel flow and quantity checks are recommended.

REMEMBER! To get chart performance, follow the chart procedures.

The information provided by paragraph 5.5 (Flight Planning Example) outlines a detailed flight plan using the performance charts in this section. Each chart includes its own example to show how it is used.

WARNING

Performance information derived by extrapolation beyond the limits shown on the charts should not be used for flight planning purposes.

5.5 FLIGHT PLANNING EXAMPLE

(a) Aircraft Loading

The first step in planning a flight is to calculate the airplane weight and center of gravity by utilizing the information provided by Section 6 (Weight and Balance) of this handbook.

The basic empty weight for the airplane as licensed at the factory has been entered in Figure 6-5. If any alterations to the airplane have been made affecting weight and balance, reference to the aircraft logbook and Weight and Balance Record (Figure 6-7) should be made to determine the current basic empty weight of the airplane.

Make use of the Weight and Balance Loading Form (Figure 6-11) and the C.G. Range and Weight graph (Figure 6-15) to determine the total weight of the airplane and the center of gravity position.

After proper utilization of the information provided, the following weights apply to the flight planning example.

The landing weight cannot be determined until the weight of the fuel to be used has been established [refer to item (g)(1)].

(1) Basic Empty Weight	1505 lbs.
(2) Occupants (3 x 170 lbs.)	510 lbs.
(3) Baggage and Cargo	50 lbs.
(4) Fuel (6 lb/gal x 44.5)	267 lbs.
(5) Engine Start, Taxi, and Runup	-7 lbs.
(6) Takeoff Weight	2325 lbs.
(7) Landing Weight	
(a)(5) minus (g)(1), (2320 lbs. minus 142.0 lbs.	2178.4 lbs.

The takeoff weight does not exceed the maximum of 2325 lbs., and the weight and balance calculations have determined that the c.g. position is within the approved limits.

(b) Takeoff and Landing

Now that the aircraft loading has been determined, all aspects of the takeoff and landing must be considered.

All of the existing conditions at the departure and destination airport must be acquired, evaluated and maintained throughout the flight.

Apply the departure airport conditions and takeoff weight to the appropriate Takeoff Performance graph (Figures 5-7 and 5-9 or 5-11 and 5-13) to determine the length of runway necessary for the takeoff and/or the barrier distance.

The landing distance calculations are performed in the same manner using the existing conditions at the destination airport and, when established, the landing weight.

The conditions and calculations for the example flight are listed below. The takeoff and landing distances required for the example flight have fallen well below the available runway lengths.

	Departure Airport	Destination Airport
(1) Pressure Altitude	500 ft.	2500 ft.
(2) Temperature	38° C	24° C
(3) Wind Component	15 kts (Headwind)	0 kts
(4) Runway Length Available	4800 ft.	7600 ft.
(5) Runway Required	2100 ft.*	1190 ft.**

NOTE

The remainder of the performance charts used in this flight planning example assume a no wind condition. The effect of winds aloft must be considered by the pilot when computing climb, cruise and descent performance.

*reference Figure 5-9
**reference Figure 5-35

(c) Climb

The next step in the flight plan is to determine the necessary climb segment components.

The desired cruise pressure altitude and corresponding cruise outside air temperature values are the first variables to be considered in determining the climb components from the Fuel, Time and Distance to Climb graph (Figure 5-19). After the fuel, time and distance for the cruise pressure altitude and outside air temperature values have been established, apply the existing conditions at the departure field to graph (Figure 5-19). Now, subtract the values obtained from the graph for the field of departure conditions from those for the cruise pressure altitude.

The remaining values are the true fuel, time and distance components for the climb segment of the flight plan corrected for field pressure altitude and temperature.

The following values were determined from the above instructions in the flight planning example.

(1) Cruise Pressure Altitude	5000 ft.
(2) Cruise OAT	16°C
(3) Fuel to Climb (2 gal. minus 0.25 gal.)	1.75 gal.*
(4) Time to Climb (12.0 min. minus 1.0 min.)	11.0 min.*
(5) Distance to Climb (14.5 miles minus 1.5 miles)	13.0 miles*

(d) Descent

The descent data will be determined prior to the cruise data to provide the descent distance for establishing the total cruise distance.

Utilizing the cruise pressure altitude and OAT, determine the basic fuel, time and distance for descent (Figure 5-31). These figures must be adjusted for the field pressure altitude and temperature at the destination airport. To find the necessary adjustment values, use the existing pressure altitude and temperature conditions at the destination airport as variables to find the fuel, time and distance

*reference Figure 5-19

values from the graph (Figure 5-31). Now, subtract the values obtained from the field conditions from the values obtained from the cruise conditions to find the true fuel, time and distance values needed for the flight plan.

The values obtained by proper utilization of the graphs for the descent segment of the example are shown below.

- | | |
|---|------------|
| (1) Fuel to Descend
(1.0 gal. minus 0.5 gal.) | 0.5 gal.* |
| (2) Time to Descend
(6.5 min. minus 3.5 min.) | 3.0 min.* |
| (3) Distance to Descend
(13.5 miles minus 7.0 miles) | 6.5 miles* |

(e) Cruise

Using the total distance to be traveled during the flight, subtract the previously calculated distance to climb and distance to descend to establish the total cruise distance. Refer to the appropriate Avco Lycoming Operator's Manual when selecting the cruise power setting. The established pressure altitude and temperature values and the selected cruise power should now be utilized to determine the true airspeed from the Cruise Performance graph (Figure 5-21 or 5-23).

Calculate the cruise fuel consumption for the cruise power setting from the information provided by the Avco Lycoming Operator's Manual.

The cruise time is found by dividing the cruise distance by the cruise speed and the cruise fuel is found by multiplying the cruise fuel consumption by the cruise time.

The cruise calculations established for the cruise segment of the flight planning example are as follows:

- | | |
|--|-------------|
| (1) Total Distance | 300 miles |
| (2) Cruise Distance
(e)(1) minus (c)(4) minus (d)(2),
(300 minus 13.0 miles minus 6.5 miles) | 280.5 miles |

*reference Figure 5-31

- (3) Cruise Power Best Economy Mixture 75% rated power
(2625 rpm)
- (4) Cruise Speed 111 kts tas*
- (5) Cruise Fuel Consumption 8.5 gph
- (6) Cruise Time
(e)(2) divided by (e)(4), (280.5
miles divided by 111 kts) 2.53 hrs.
- (7) Cruise Fuel
(e)(5) multiplied by (e)(6), (8.5
gph multiplied by 2.53 hrs.) 21.5 gal.

(f) Total Flight Time

The total flight time is determined by adding the time to climb, the time to descend and the cruise time. Remember! The time values taken from the climb and descent graphs are in minutes and must be converted to hours before adding them to the cruise time.

The following flight time is required for our flight planning example.

- (1) Total Flight Time
(c)(3) plus (d)(1) plus (e)(6),
(0.18 hrs. plus 0.05 hrs. plus 2.53 hrs.) 2.76 hrs.

(g) Total Fuel Required

Determine the total fuel required by adding the fuel to climb, the fuel to descend and the cruise fuel. When the total fuel (in gallons) is determined, multiply this value by 6 lb/gal. to determine the total fuel weight used for the flight.

The total fuel calculations for the example flight plan are shown below.

- (1) Total Fuel Required
(c)(5) plus (d)(3) plus (e)(7),
(1.75 gal. plus 0.5 gal. plus 21.5 gal.) 23.75 gal.
(23.75 gal. multiplied by 6 lb/gal.) 142.5 lbs.

*reference Figure 5-23


THIS PAGE INTENTIONALLY LEFT BLANK

5.7 PERFORMANCE GRAPHS


LIST OF FIGURES

Figure No.		Page No.
5-1	Temperature Conversion.....	5-11
5-3	Airspeed System Calibration	5-12
5-5	Stall Speed	5-13
5-6	Wind Components.....	5-13b
5-7	0° Flaps Takeoff Ground Roll	5-14
5-9	0° Flaps Takeoff Performance.....	5-15
5-11	25° Flaps Takeoff Ground Roll	5-16
5-13	25° Flaps Takeoff Performance.....	5-17
5-15	Engine Performance	5-18
5-17	Climb Performance	5-19
5-19	Fuel, Time and Distance to Climb	5-20
5-21	Best Power Cruise Performance	5-21
5-23	Best Economy Cruise Performance.....	5-22
5-25	Best Power Mixture Range	5-23
5-27	Best Economy Mixture Range.....	5-24
5-29	Endurance	5-25
5-31	Fuel, Time and Distance to Descend	5-26
5-33	Glide Performance	5-27
5-35	Landing Distance	5-28

THIS PAGE INTENTIONALLY LEFT BLANK

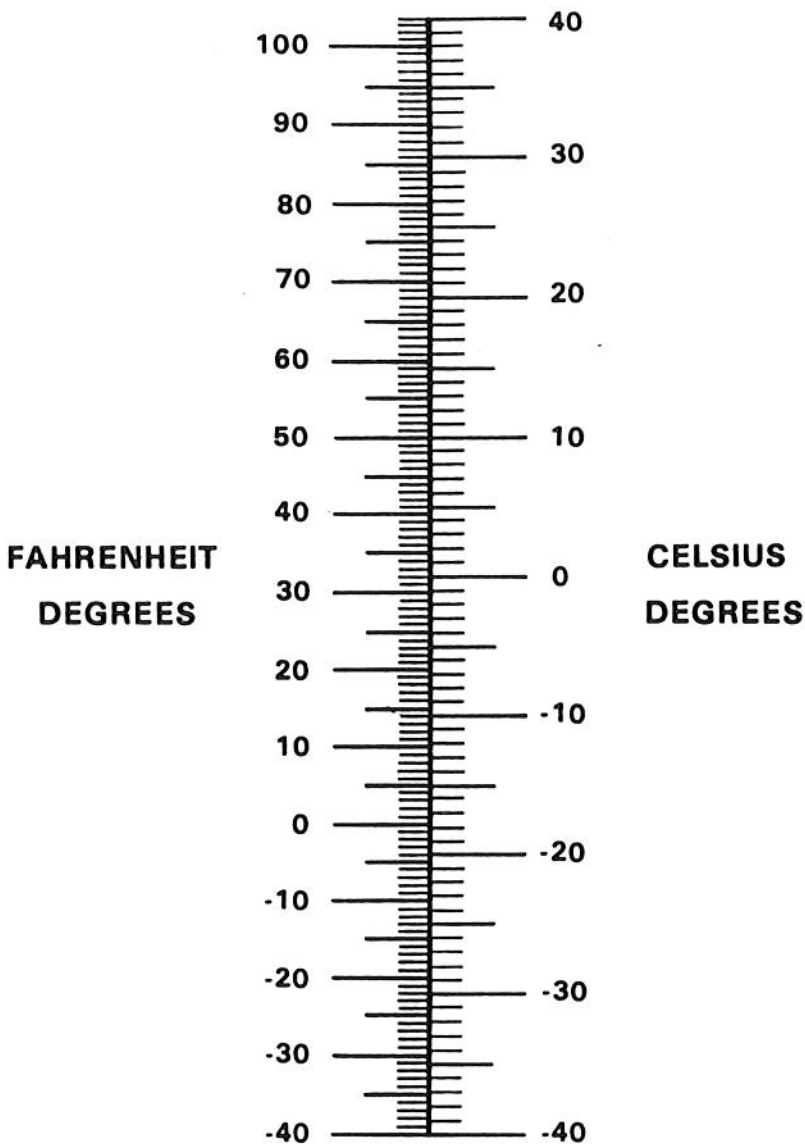


TEMPERATURE CONVERSION
Figure 5-1

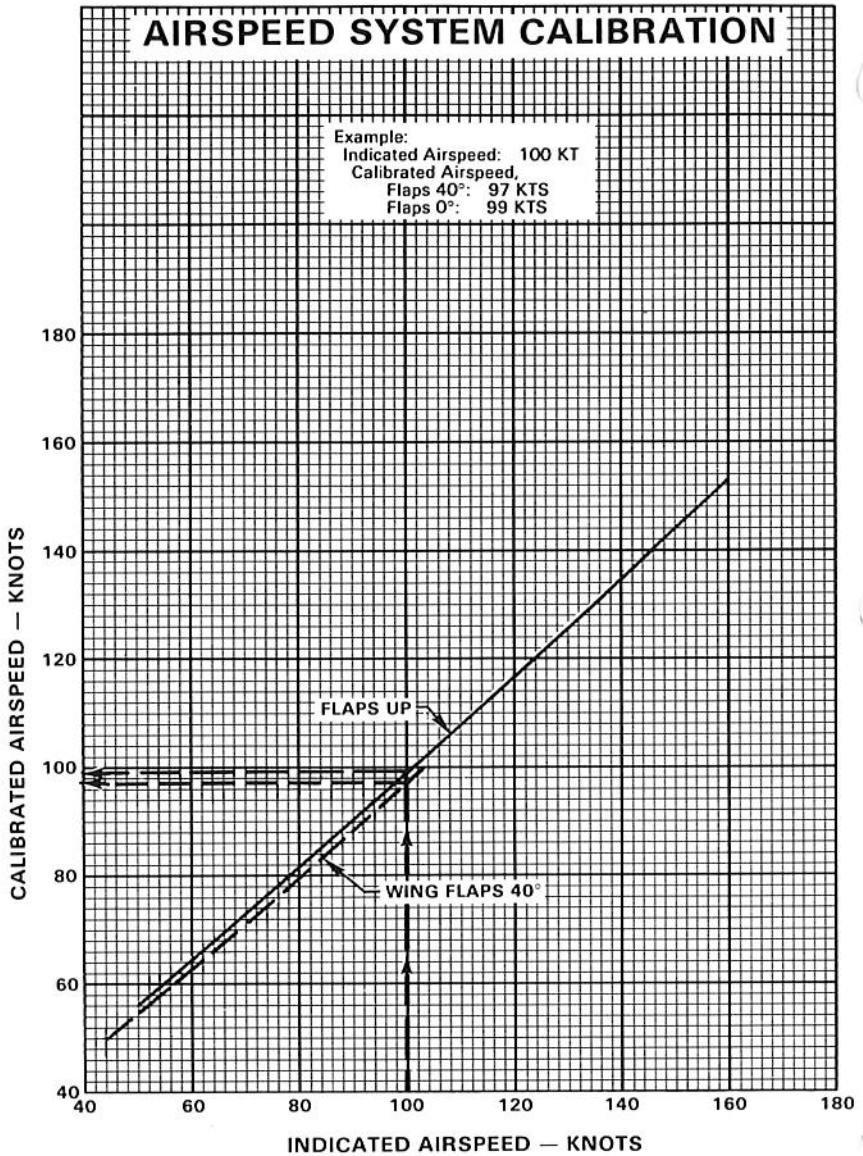

AIRSPEED SYSTEM CALIBRATION

Figure 5-3

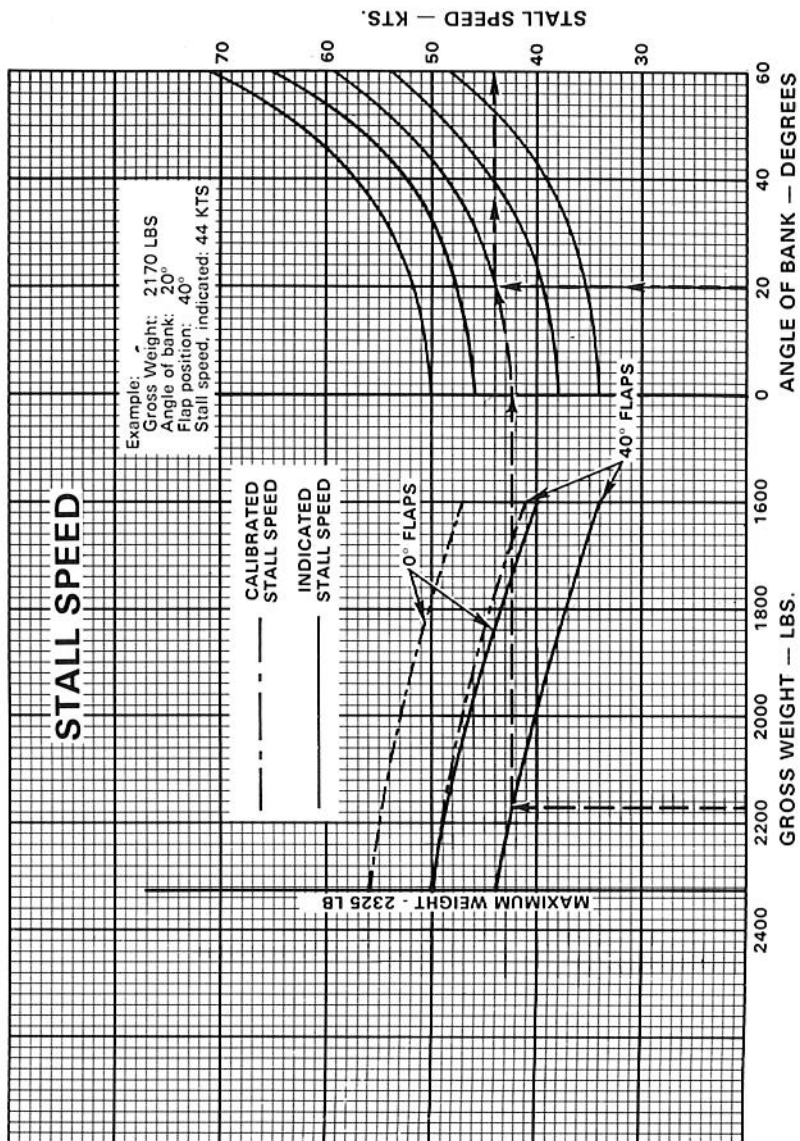


STALL SPEED
Figure 5-5

THIS PAGE INTENTIONALLY LEFT BLANK

WIND COMPONENTS


Example:
Wind velocity: 30 KT
Angle between flight path and wind: 30°
Headwind: 26 KT
Crosswind component: 15 KT

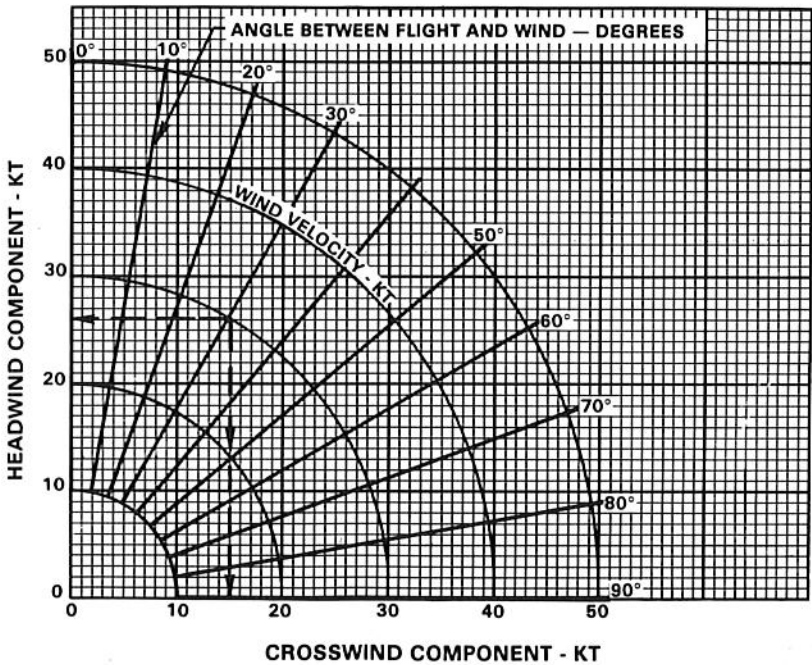

WIND COMPONENTS
Figure 5-6


Tabelle ungültig !

☞ Siehe Thielert AFM

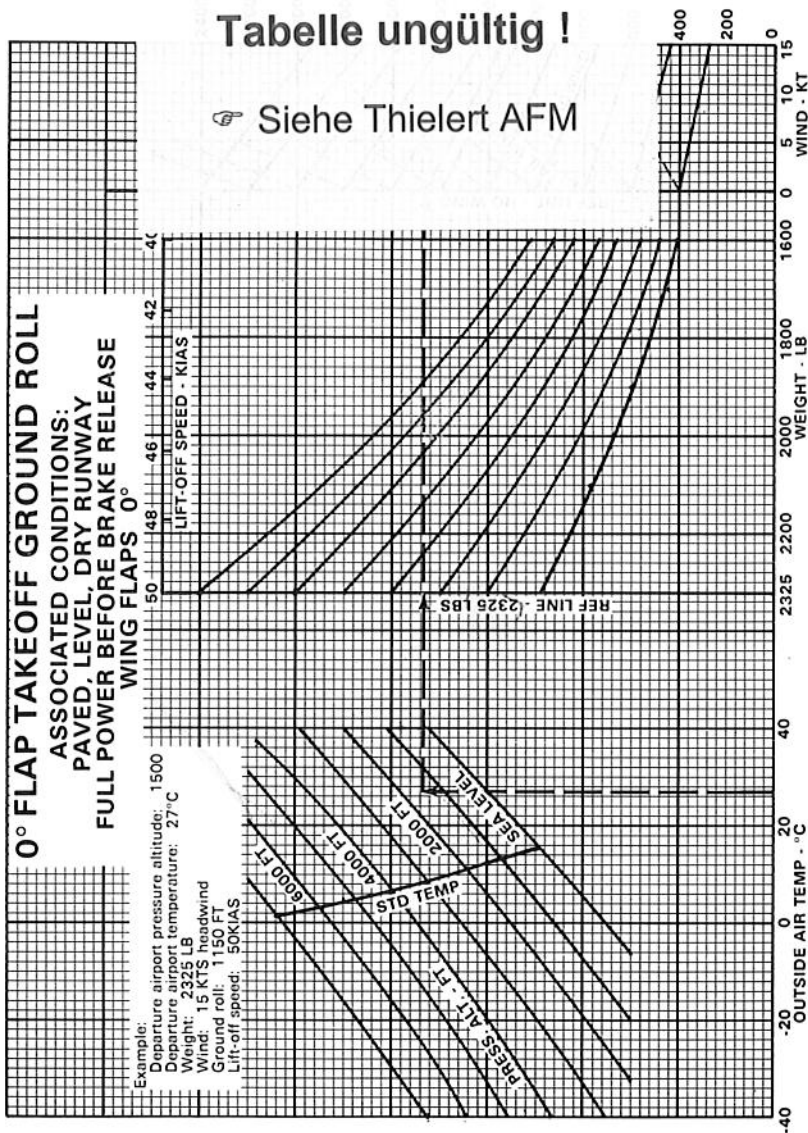

0° FLAPS TAKEOFF GROUND ROLL

Figure 5-7

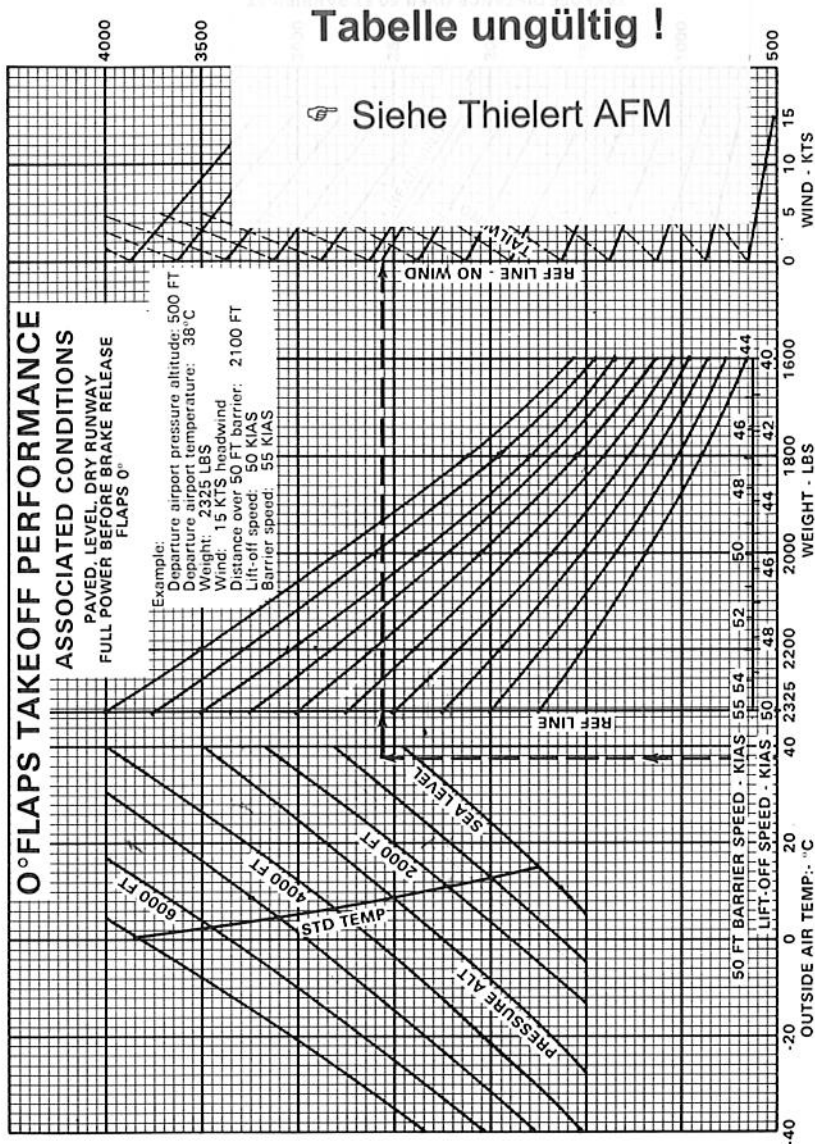


0° FLAPS TAKEOFF PERFORMANCE

Figure 5-9


Tabelle ungültig !

☞ Siehe Thielert AFM

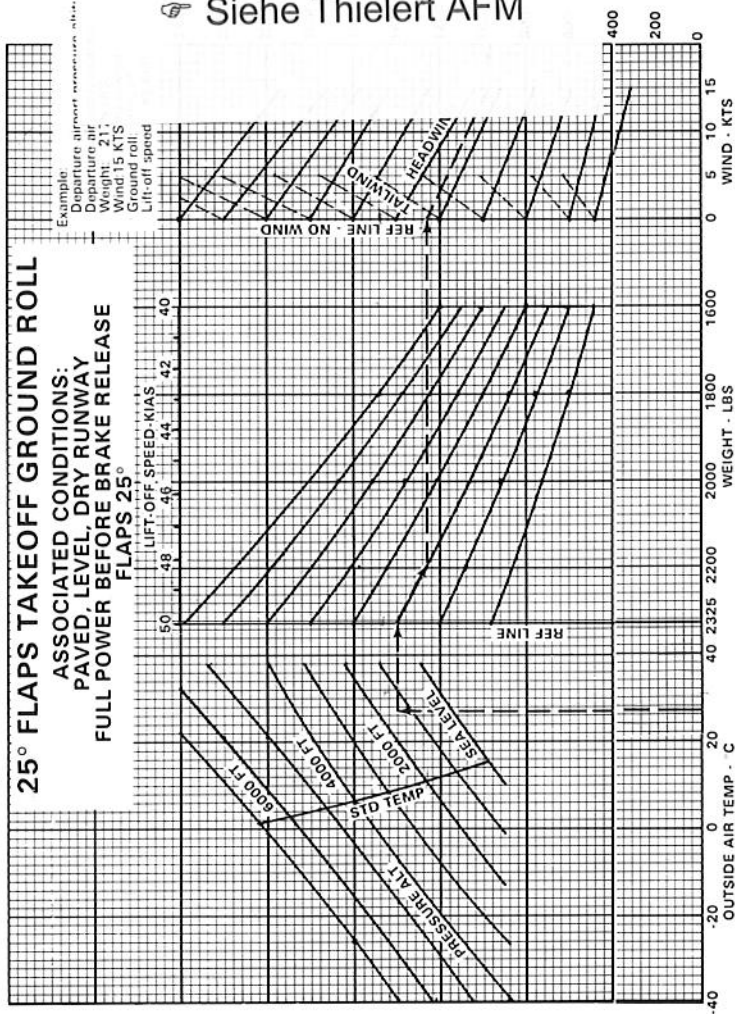


25° FLAPS TAKEOFF GROUND ROLL

Figure 5-11

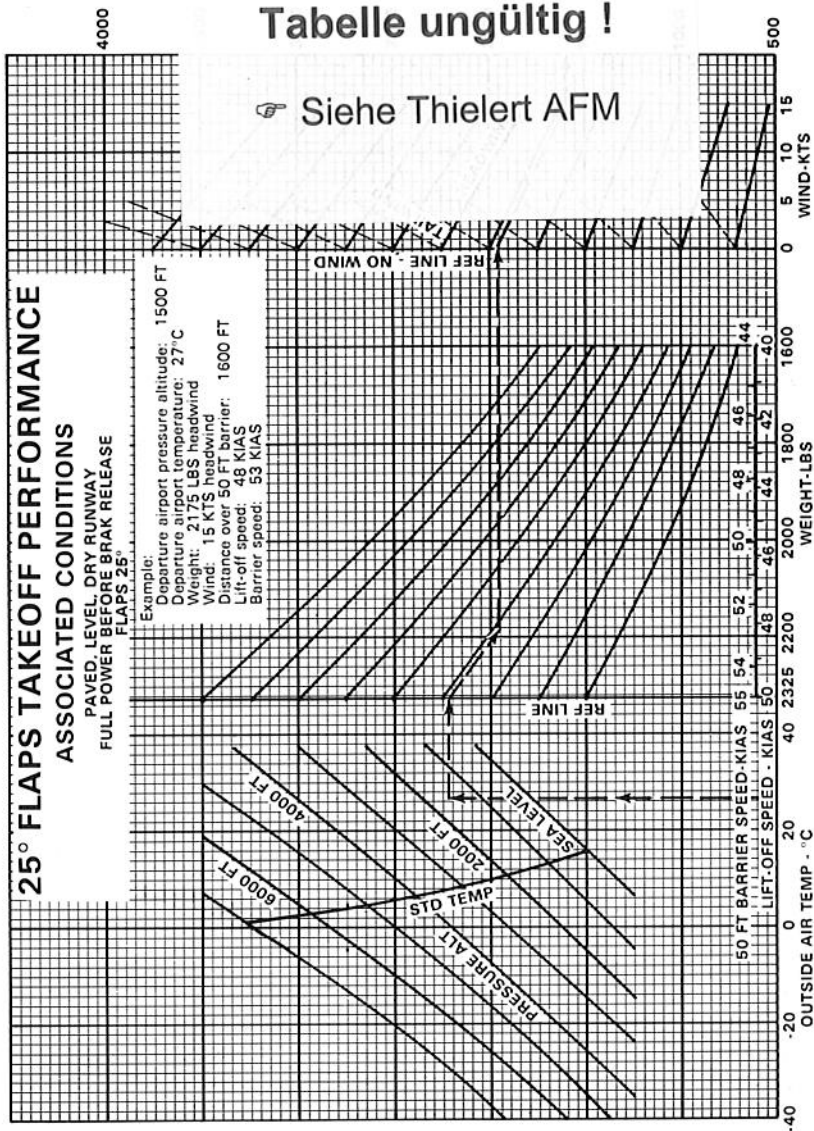


25° FLAPS TAKEOFF PERFORMANCE
Figure 5-13

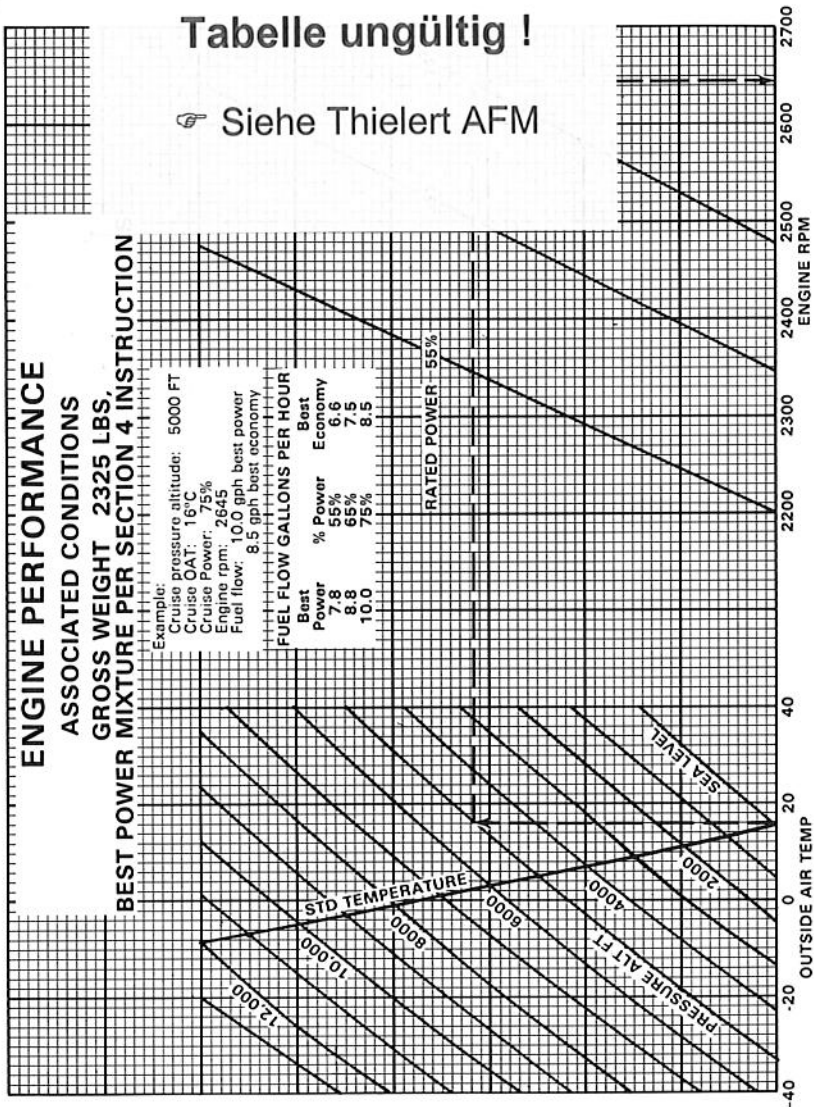

ENGINE PERFORMANCE
Figure 5-15

Tabelle ungütig !


☞ Siehe Thielert AFM

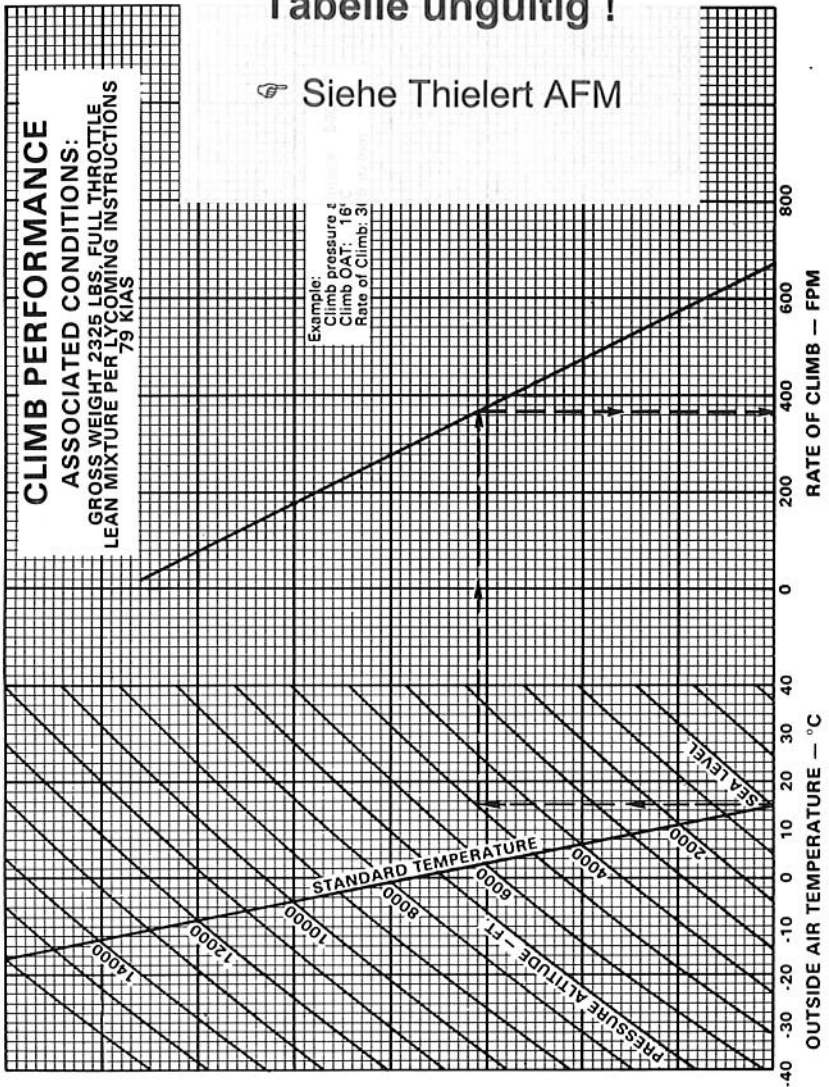

CLIMB PERFORMANCE
Figure 5-17


Tabelle ungültig !

☞ Siehe Thielert AFM

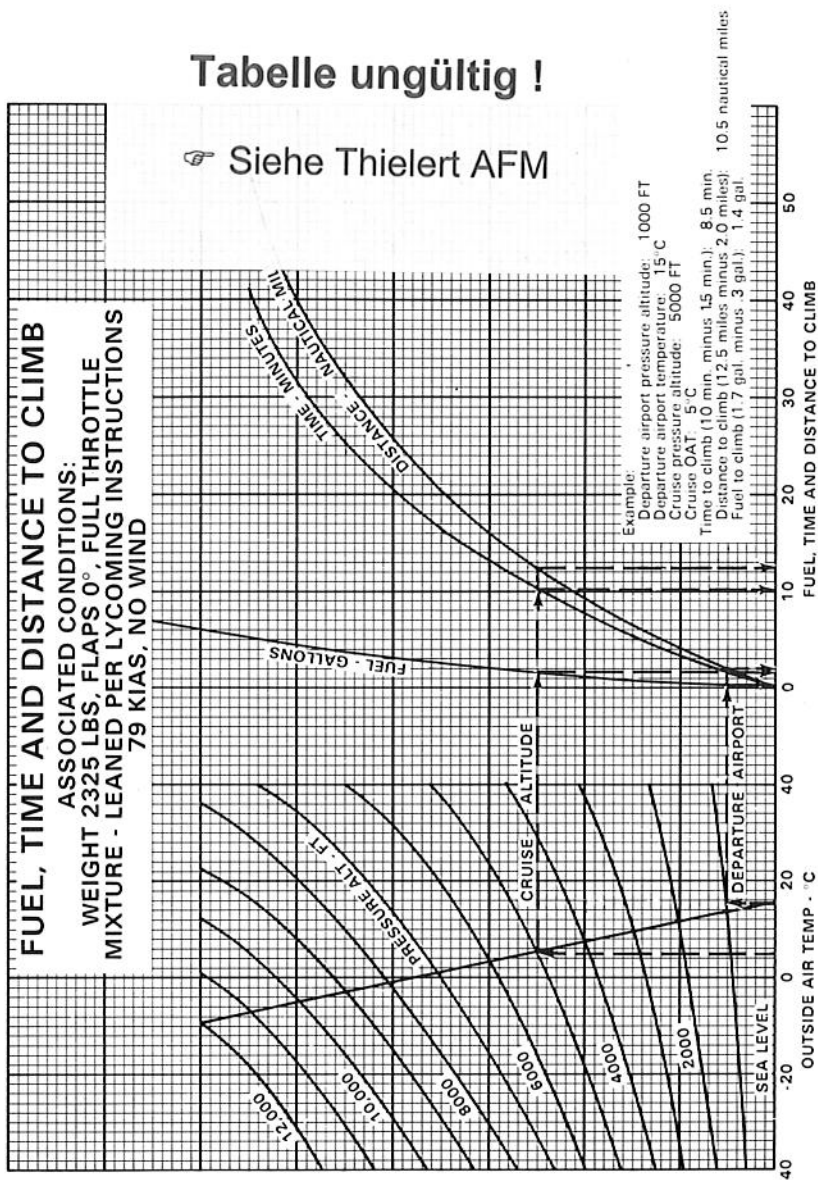


FUEL, TIME AND DISTANCE TO CLIMB

Figure 5-19

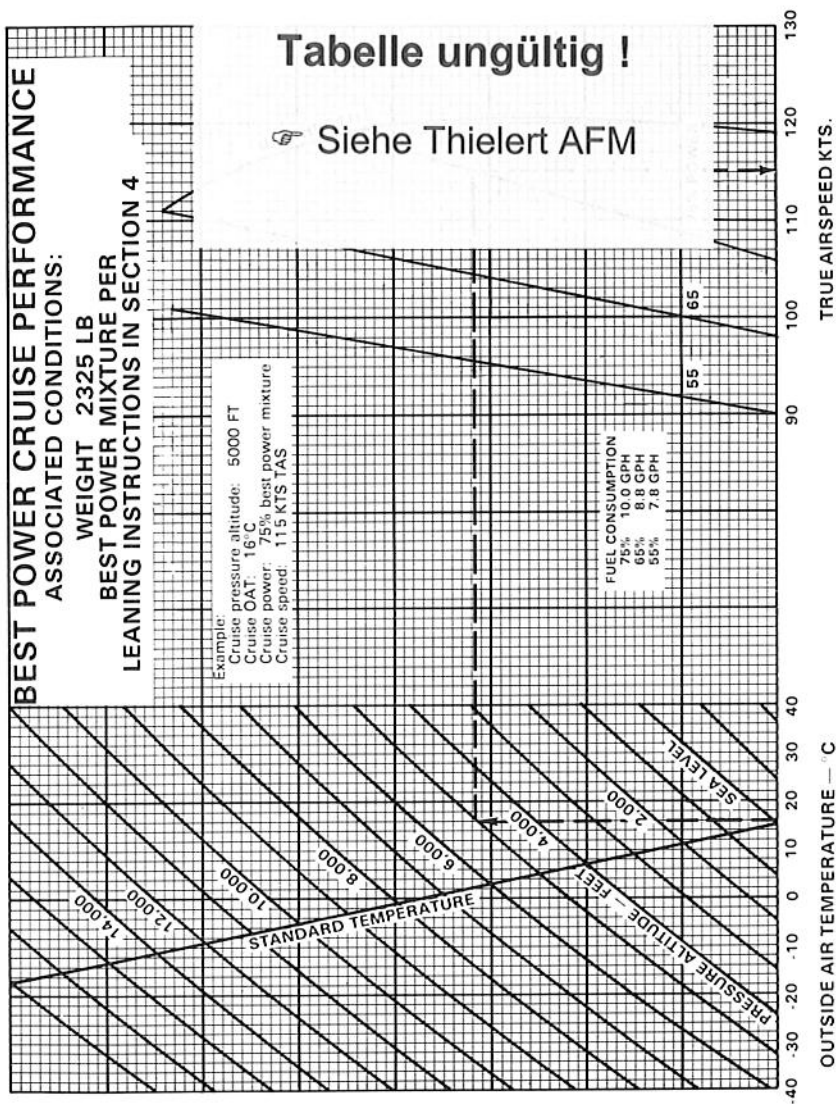


BEST POWER CRUISE PERFORMANCE

Figure 5-21

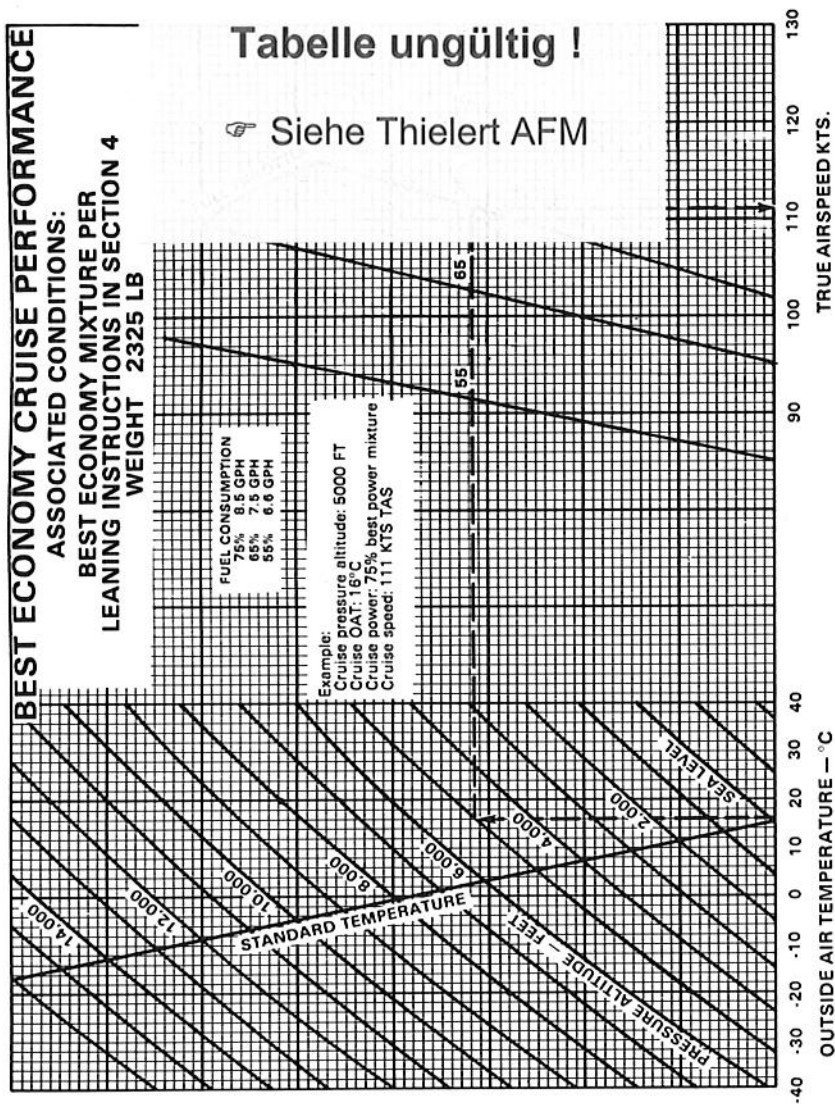


BEST ECONOMY CRUISE PERFORMANCE

Figure 5-23

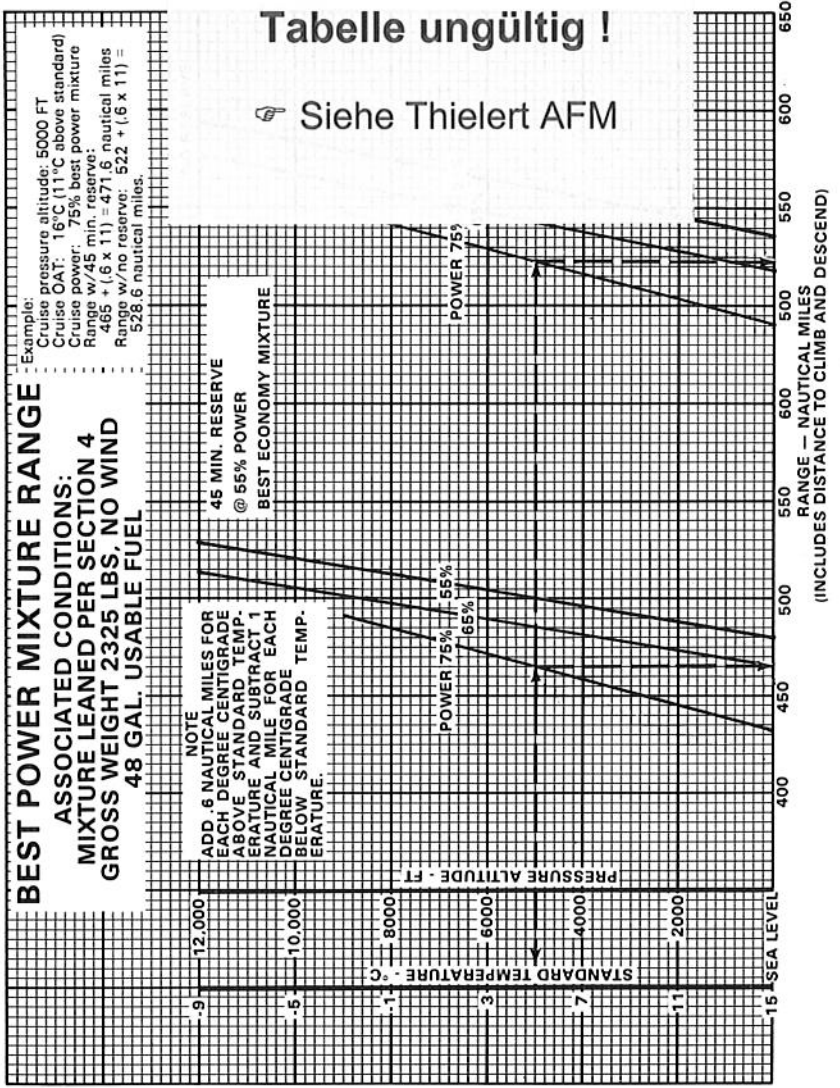

BEST POWER MIXTURE RANGE
Figure 5-25

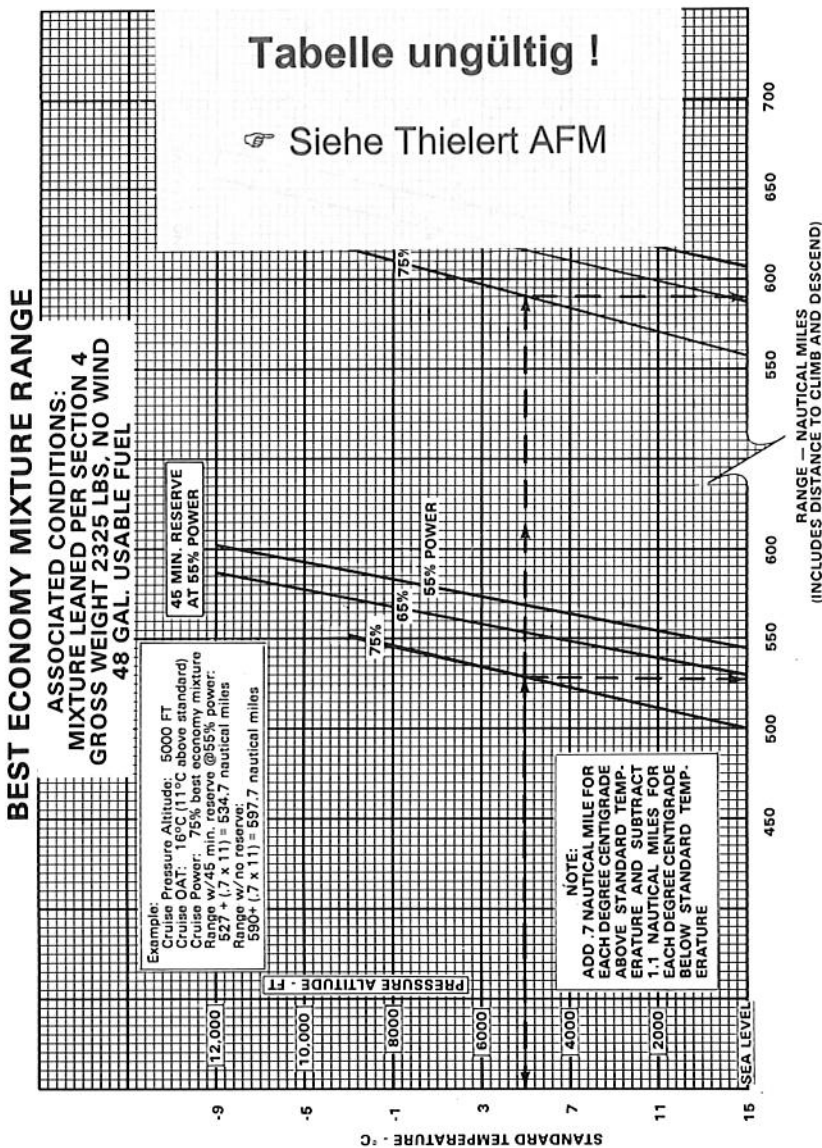

BEST ECONOMY MIXTURE RANGE

Figure 5-27


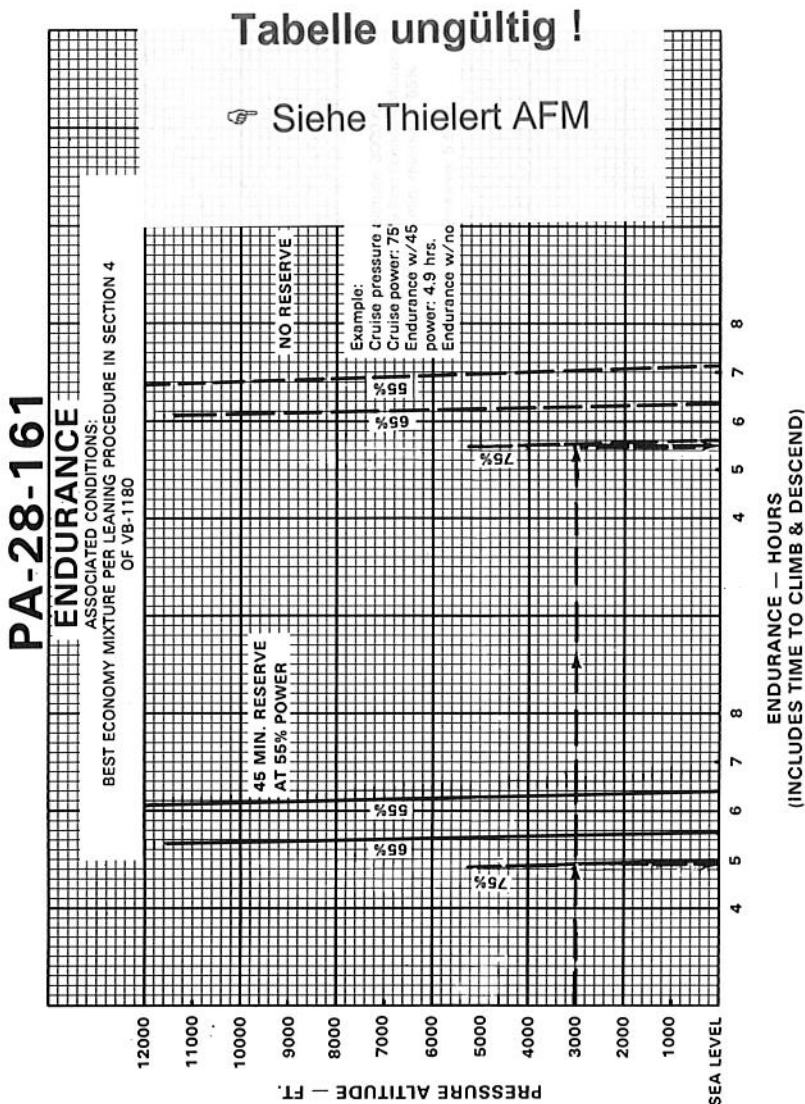



Tabelle ungütig !

☞ Siehe Thielert AFM

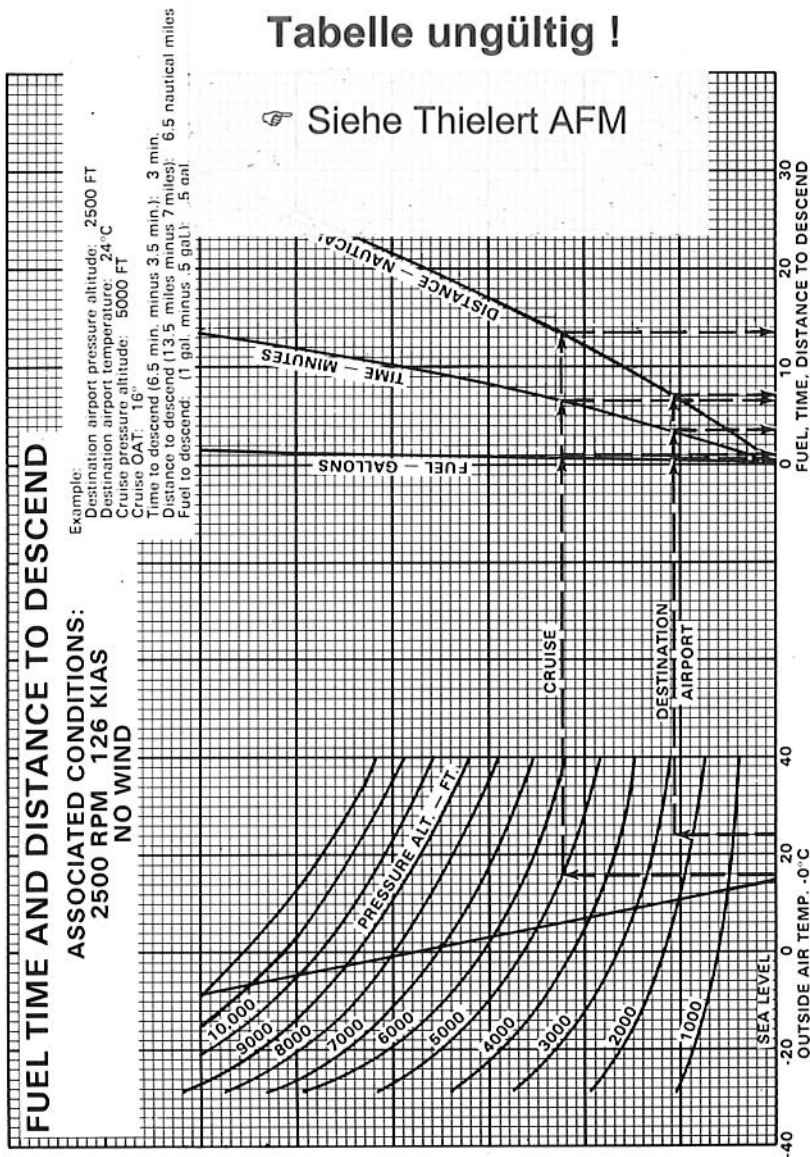


FUEL, TIME AND DISTANCE TO DESCEND

Figure 5-31

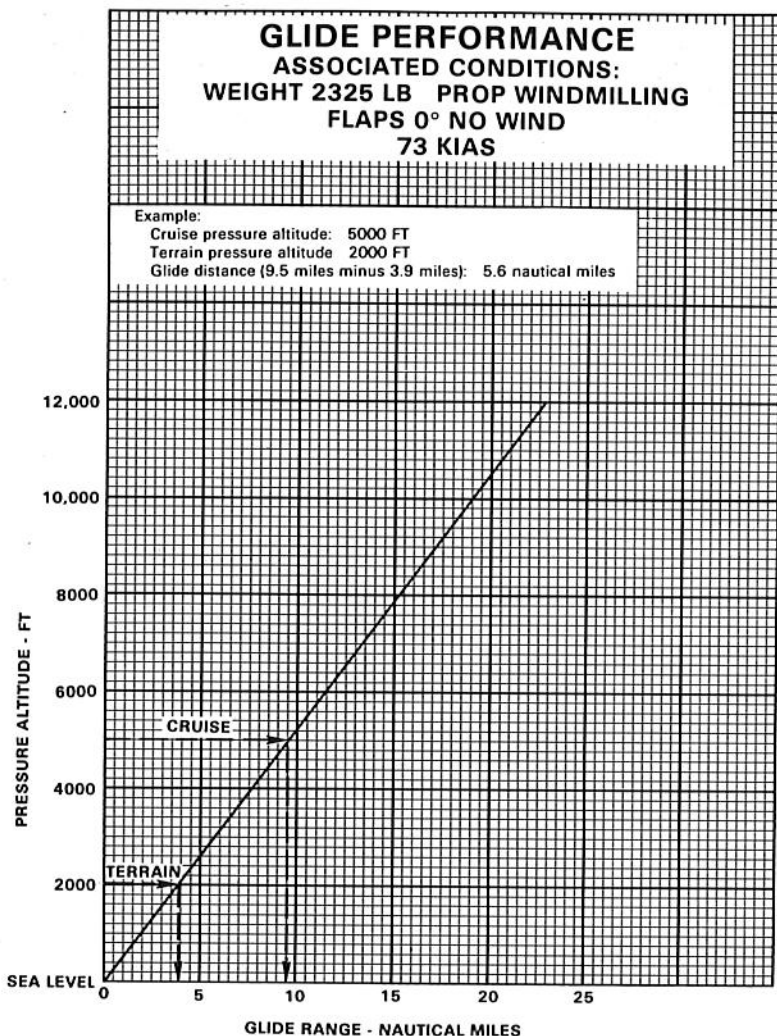

GLIDE PERFORMANCE
Figure 5-33

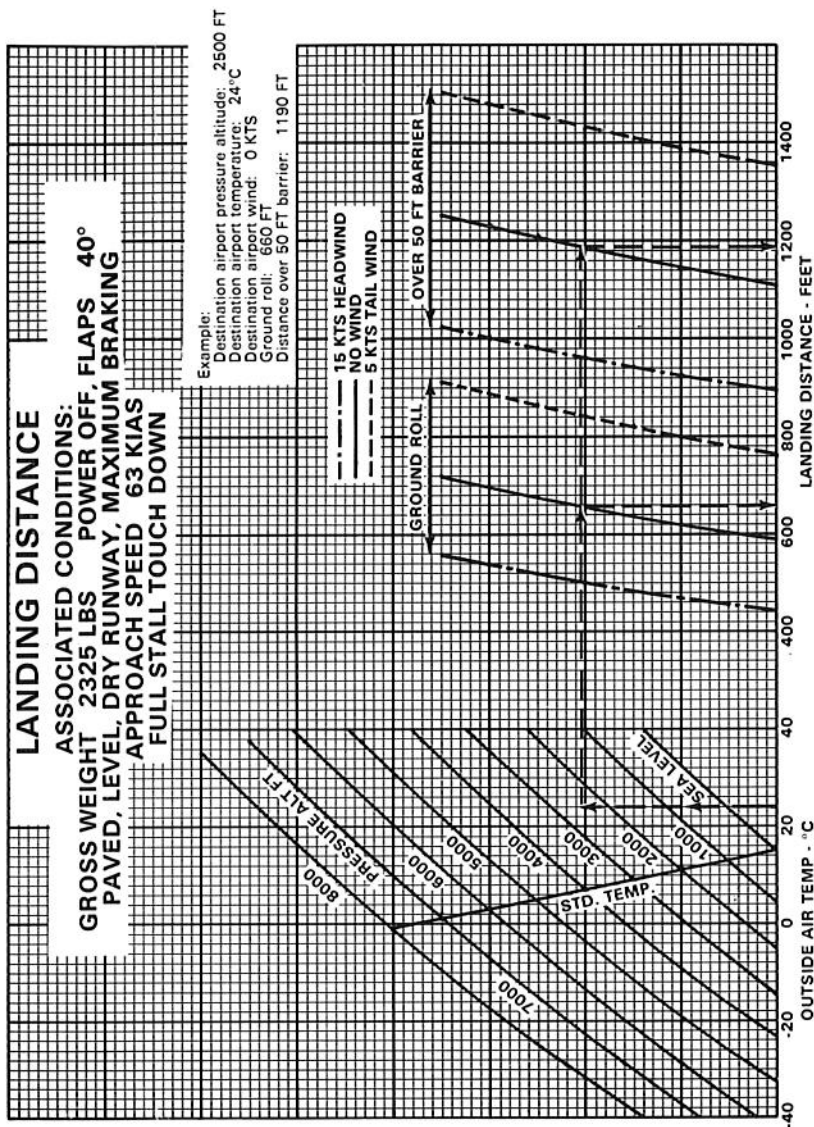

LANDING DISTANCE
Figure 5-35